


STRAINER DUPLEX BUCKET TYPE

CARBON STEEL / STAINLESS STEEL



Tel: 03-5569 2933 (6 Lines) Fax: 03-5569 2588, 5569 2788
Email: mercoid@mercoid.com.my, valmicro@valmicro.com.my
http://www.mercoid.com.my

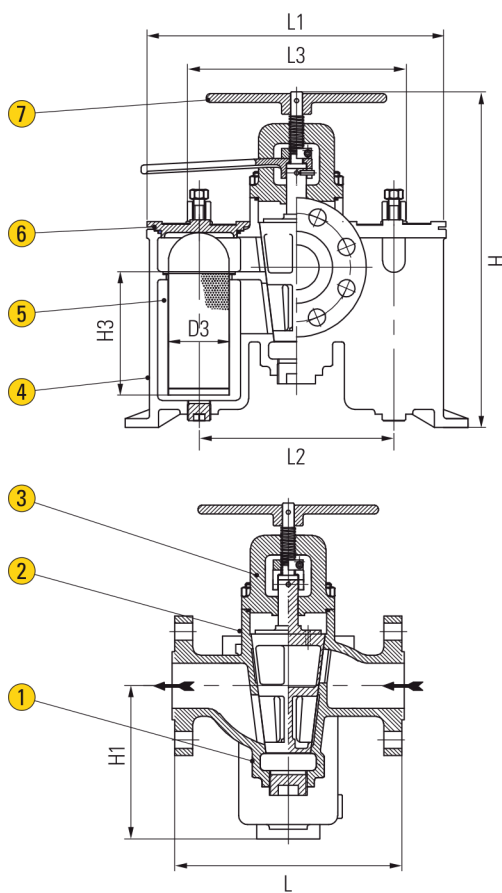

APPLICATION

Suitable for water, steam, oil, gases and non-abrasive media
(Refer to corrosion resistance table for valve materials selection).

SPECIFICATION

End Connection Flange end to ANSI 150, ANSI 300,
DIN PN16, PN40, JIS 10K, JIS 20K
Pressure Rating Class 150 and 300
Screen Size 40 Mesh, 60 Mesh and 80 Mesh

MATERIAL

Parts	Material				
1 Plug Valve Body	A126	WCB	FC8	FC8M	
2 Plug	A126	WCB	FC8	FC8M	
3 Plug Valve Bonnet	A126	WCB	FC8	FC8M	
4 Strainer Body	A126	WCB	FC8	FC8M	
5 Mesh	304	304	304	316	
6 Strainer Bonnet	A126	WCB	FC8	FC8M	
7 Handle	DCI	DCI	DCI	DCI	

JIS 10K / ANSI 150LB/DIN PN16

Unit : mm

Inch	L	L1	L2	L3	H	H1	D3	H3
3/4"	205	270	180	190	285	115	40	70
1"	205	270	180	190	285	115	68	100
1-1/2"	240	380	230	260	465	155	78	130
2"	272	420	255	305	550	280	95	200
2-1/2"	277	430	270	320	580	294	95	200
3"	315	470	305	345	640	320	95	200
4"	400	520	350	430	880	370	107	350
5"	460	690	450	475	1000	410	140	380
6"	500	750	480	510	1060	430	164	400
8"	670	1030	610	955	1350	633	225	600
10"	950	1250	970	1220	1400	650	280	600
12"	1010	1480	1020	1100	1785	700	320	765

*Specification given are subject to changed without further notice.