


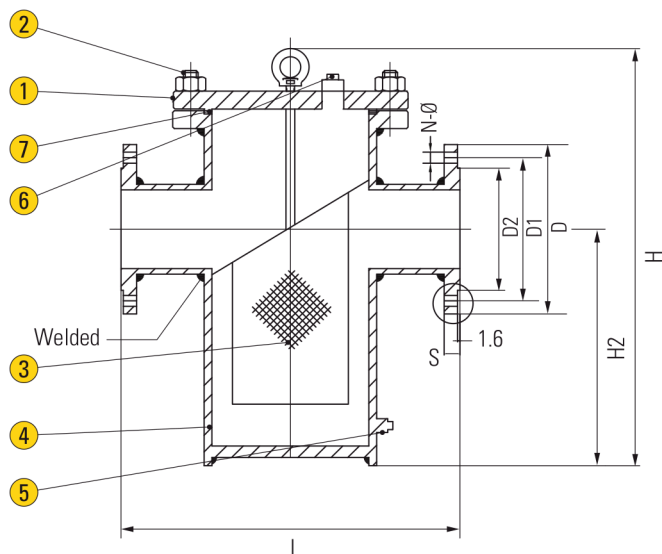

APPLICATION

Suitable for water, steam, oil, gases and non-abrasive media
 (Refer to corrosion resistance table for valve materials selection).

SPECIFICATION

End Connection Flange end to ANSI 150, ANSI 300, DIN PN16, PN40, JIS 10K, JIS 20K
 Pressure Rating Class 150 and 300
 Screen Size 40 Mesh, 60 Mesh and 80 Mesh

MATERIAL

Parts	Material		
1 Bonnet	CS	SS304	SS316
2 Bolting	B7 / 2H	A4-70	A4-70
3 Screen	SS304	SS304	SS316
4 Body	CS	SS304	SS316
5 Drain	CS	SS304	SS316
6 Vent	CS	SS304	SS316
7 Gasket	Graphite	Graphite	Graphite

DIMENSIONS

Unit : mm

Size DN	L	Ø	H	H1	D	D1	D2	S	N-Ø
50	280	133	300	180	165	125	102	18	4-18
65	330	133	350	220	185	145	122	18	8-18
80	340	159	400	260	200	160	138	20	8-18
100	420	219	470	310	220	180	158	20	8-18
125	500	273	540	380	250	210	188	22	8-18
150	500	273	620	430	285	240	212	22	8-22
200	560	325	780	530	340	295	268	24	8-22
250	660	377	930	640	395	350	320	26	12-22
300	750	478	1120	800	445	400	370	26	12-22
350	800	530	1300	930	505	460	430	26	16-22