


ANGLE SEAT VALVE

SINGLE / DOUBLE ACTING

PA / ALUMINIUM / STAINLESS STEEL

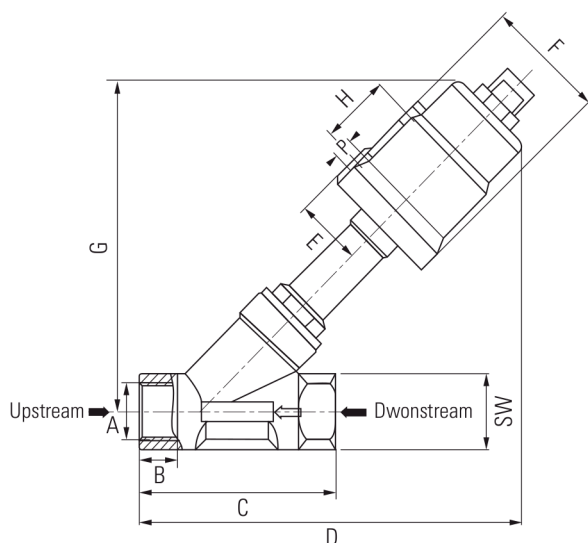

APPLICATION

Suitable for water, steam, oil, gases and non-abrasive media
 (Refer to corrosion resistance table for valve materials selection).

SPECIFICATION

End Connection	Female thread
Pressure Rating	Up to 25 Bar
Working Temperature	Up to 200°C

PRODUCT FEATURE

Model Specification	Normally Closed	P010NC	P015NC	P020NC	P025NC	P032NC	P040NC	P050NC	P065NC	P080NC
	Normally Open	P010NO	P015NO	P020NO	P025NO	P032NO	P040NO	P050NO	P065NO	P080NO
Material of Body		Gun Metal / SS304 / SS316 / SS316L								
Material of Actuator		PA / Aluminium / Stainless Steel								
Operating Method		Plunger Pilot								
Ambient and Fluid		Air, Water, Oil, Steam (50CTS Bellow)								
Port Size		3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"
Seat Seal		PTFE / FPM								
Stem Seal		PTFE / FPM								
Piston Seal		PTFE / FPM / NBR								
Tempreture of Medium	PTFE	-10 ~ 200°C								
	FPM	-10 ~ 150°C								
Installing		Downstream / Upstream								

DIMENSIONS

Unit : mm

Size			A	B	C	D	E	F	G	H	P	SW
Port	DN	Actuator										
3/8"	10	40	G3/8	12	65	144	28	53	105	38	G1/8	25
		50	G3/8	12	65	144	35	56	105	38	G1/8	25
1/2"	15	40	G1/2	14	76	157	28	53	113	38	G1/8	28
		50	G1/2	14	76	182	35	56	142	38	G1/8	28
3/4"	20	50	G3/4	16	92	189	35	56	152	38	G1/8	32
		63	G3/4	16	92	189	43	70	152	44	G1/8	32
1"	25	50	G1	21	103	207	35	56	155	38	G1/8	39
		63	G1	21	103	217	43	70	176	44	G1/8	39
1-1/4"	32	63	G1-1/4	19	112	222	43	70	177	44	G1/8	49
1-1/2"	40	63	G1-1/2	21	129	225	43	70	182	44	G1/8	56
2"	50	63	G2	27	143	249	43	70	196	44	G1/8	68
		90	G2	27	143	268	56	94	206	67	G1/4	68
2-1/2"	65	90	G2-1/2	28	186	290	56	94	215	67	G1/4	84
3"	80	125	G3	34	218	335	73	135	295	67	G1/4	101

*Specification given are subject to changed without further notice.