
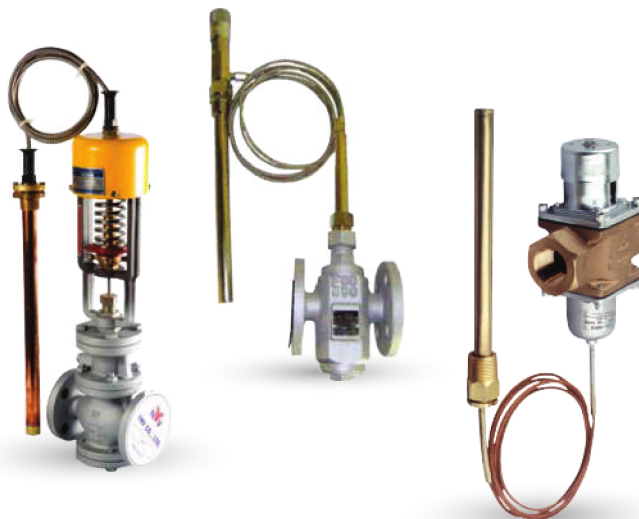


CONTROL VALVE

SELF ACTING TEMPERATURE CONTROL

DUCTILE IRON / CAST IRON

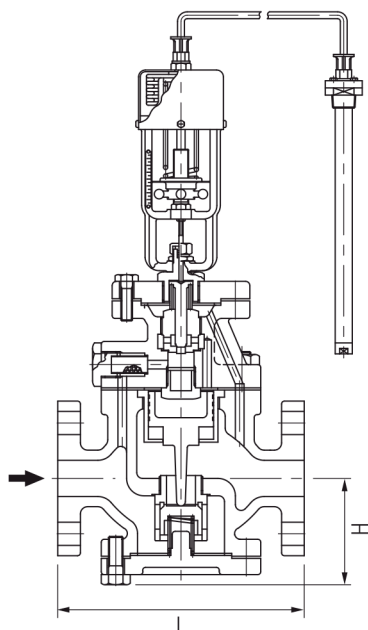

APPLICATION

Suitable for water, steam, oil, gases and others non-abrasive media
 (Refer to corrosion resistance table for valve materials selection).

SPECIFICATION

Size Range	1/2" to 12"
Valve Range	2-way and 3-way
Design Construction	Single seated, Single seated pressure balance and double seated designed
Connection	Threaded end, Flanged end to DIN PN16, PN25, PN40

PRODUCT FEATURE

Working Pressure (kgf/cm ²)	Max 10
Temperature Range (°C)	40 ~ 120
Working Temperature (°C)	220
Valve Type	Pilot Acting
Connection	JIS 10K Flanged
Capillary Tube Length	2M, 3M, 5M
Materials	Body : Ductile Iron, Cast Iron Trim : Stainless Steel Sensor : Copper Tube

DIMENSIONS

Unit : mm

Part / Size (DN)	15	20	25	32	40	50	65	80	100
L	165	165	170	200	200	220	250	290	320
H1	75	75	75	85	85	92	110	130	150

ADJUSTING RANGE

Unit : °C

Adjusting (°C)	40 ~ 60	50 ~ 70	60 ~ 80	70 ~ 90	80 ~ 100
Max (°C)	70	80	90	100	110