

FOOT VALVE

CAST IRON / STAINLESS STEEL

VARIMEX valves[®]
CO. LTD.

MERCOID

Tel: 03-5569 2933 (6 Lines) Fax: 03-5569 2588, 5569 2788
Email: mercoid@mercoid.com.my, valmicro@valmicro.com.my
http://www.mercoid.com.my


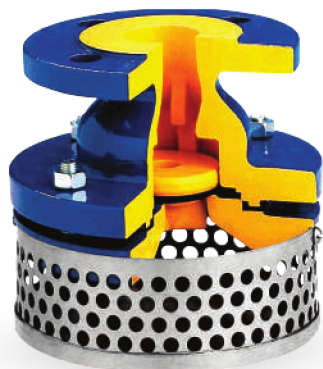


FIG 935

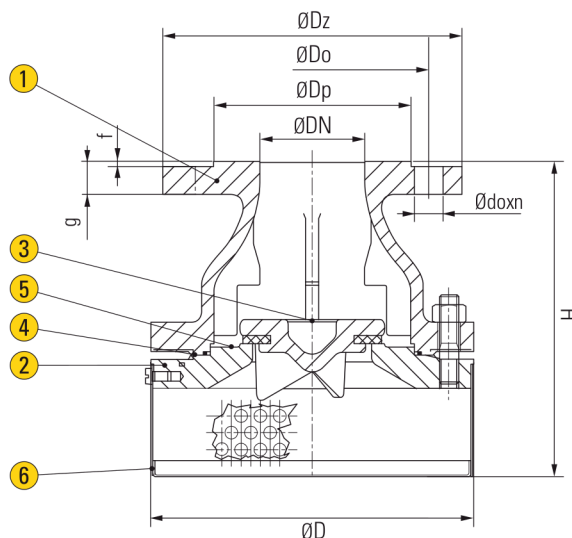

APPLICATION

Suitable for industrial cold and hot water, neutral fluids.

SPECIFICATION

End Connection
Pressure Rating
Working Temperature
Test Pressure (Hydrostatic)

Flanged end to DIN 2526 PN16
PN16
Up to 90°C
Body - 24 Bar
Seat - 17.6 Bar

MATERIAL

Parts	Fig. 935 - Cast Iron	Fig. 935 - Stainless Steel
1 Body	EN-GJL-250	Stainless steel 1.4031 / 1.4408
2 Bonnet		
3 Disc		
4 / 5 Gasket	EPDM	PTFE
6 Screen	Stainless steel 1.4301	Stainless steel 1.4408

* Note : Screen bottom without holes - DIN 3259

DIMENSIONS

Unit : mm

Size (DN)	D	Dz	Dp	Do	g	f	do	n	H	Weight (Kg)
40	170	150	84	110	18	3	19	4	155	8.5
50	180	165	99	125	20	3	19	4	175	9.5
65	200	185	118	145	20	3	19	4	215	12.5
80	240	200	132	160	22	3	19	8	265	18.0
100	270	220	156	180	22	3	19	8	315	26.0
125	310	250	184	210	24	3	19	8	335	32.5
150	360	285	211	240	24	3	23	8	415	43.0
200	440	340	266	295	26	3	23	8	500	74.0
250	520	395	319	350	28	3	23	12	625	107.0
300	570	445	370	400	28	4	23	12	785	150.0

* Note : Mesh = Ø 8mm

*Specification given are subject to changed without further notice.